Laying Clay Pavers

Setting Proper Grid System

Best Practices

-Clay Pavers have size variation due to firing process.

-Avoid mixing batches.

-Grid lines should be set every 4'. Smaller jobs, set at 3'

Best Practices

-Lay pavers out of several cubes for best color blend.

-Installer is responsible for color blending.

-Installer is responsible for proper joint spacing.

Step 3

-Set chalk lines in sand using the larger of the 2 measurements from Step 2.

Step 1

-Lay a 6 paver by 6 paver starting square from pavers at your job.

-Align the joints and properly space pavers. Joints need to be 1/16" to 3/16". 1/8" is optimum.

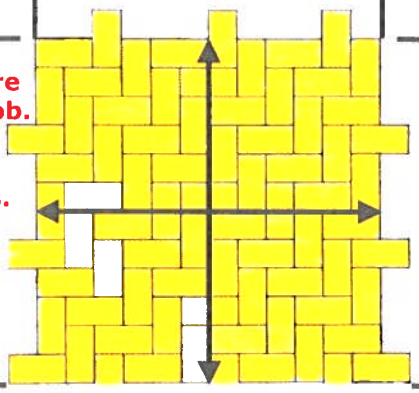

Step 2

-Measure the starting square vertically and horizontally as shown by the arrows to the left.

-The largest measurement is used to set chalk lines on screeded sand.

PINE HALL BRICK

BUILD YOUR DREAMS